


WT-4514 Double-sided foam tape

PRODUCT AND APPLICATION DESCRIPTION

Double-sided, closed-cell foam adhesive tape. The tape remains permanently elastic, offers very good expansion compensation between different materials and compensates for irregular surfaces. Furthermore, it is suitable as sealing and vibration protection, for bonding on polar smooth surfaces indoors and outdoors, for fastening and mounting decorative strips, type plates, fascia boards, installation and decorative parts as well as for self-adhesive finishing of plastic and metal profiles.

- | Can be used for indoor and outdoor areas
- | Extremely good UV, ageing, weathering and plasticiser resistance

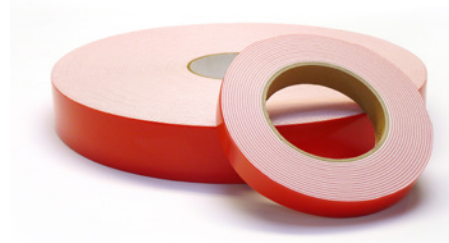

TECHNICAL DATA

Carrier material:	PE-Foam
Thickness: (without liner)	1.1 mm ±0.1 mm
Liner:	Red foil
Adhesive:	Acrylic
Adhesion to steel:	900 gf/10 mm
Temperature range:	Up to +80 °C
Application temperatur:	+21 °C to +38 °C
Available colours:	White

FURTHER INFORMATION

To achieve the optimal adhesive strength, the substrate must be free from separating agents such as greases, oils, surfactants, dirt and dust. Immediately after unrolling, apply the tape to the surface and press it down firmly. The storage has to be dry and UV-protected between +5 °C and +25 °C.

Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.