


WT-5407 Anti-slip profile - General Line

Version with anti-slip coating »WT-5415« Soft R10

PRODUCT AND APPLICATION DESCRIPTION

The stair nosing profiles consist of a support profile made of aluminium composite and an anti-slip covering. This creates a strong anti-slip effect that is suitable for street and work shoes.


- | WT-5415 anti-slip floor covering with slip resistance R10 according to DIN EN 16165
- | Suitable for indoor and outdoor use
- | Wear-resistant and slip-proof, even with heavy foot traffic
- | Easy to clean
- | Individual anti-slip covering and special lengths possible

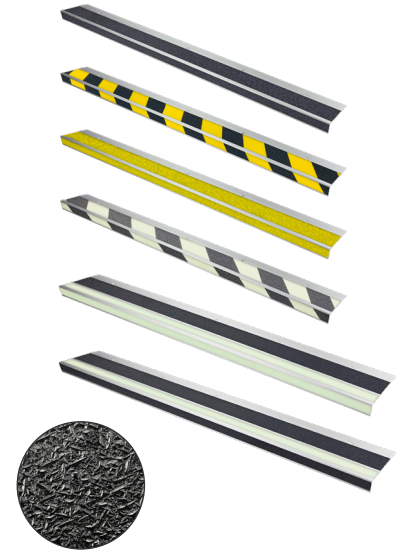


TECHNISCHE DATEN

Carrier material:	Aluminum silver anodized
Carrier strength:	2,6 mm ± 0,1 mm
Total thickness:	2,6 mm ± 0,1 mm
Mounting:	Screwable
Slip resistance:	R10 according to DIN EN 16165
Temperature range:	-30°C to +70°C
Application temperature:	≥ 12°C
Lengths:	600, 800, 1000, upon request tolerance: ±4mm

Version: narrow

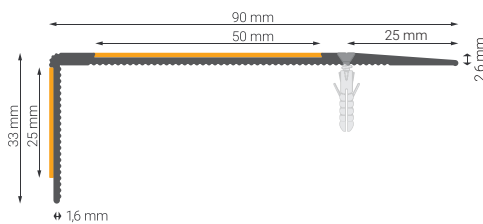

Version: wide

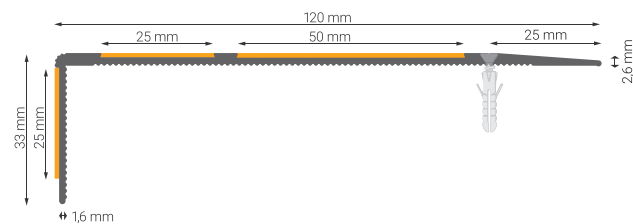

FURTHER INFORMATION

The applied anti-slip coating has a thickness of approx. 0.9 mm. The profiles are pre-drilled, which allows an easy installation even on difficult, uneven, porous or dirty surfaces. The storage should be dry and UV-protected between +5 °C and +25 °C.

Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.