


## WT-5429 Floor marking tape with anti-slip surface

### PRODUCT AND APPLICATION DESCRIPTION

Hard-wearing, durable, self-adhesive floor marking tape. Ideal for dry areas, quick to apply, wear-resistant, easy to clean and immediately passable. The WT-5429 is extra thin and tear-resistant and has an anti-slip surface with slip resistance R10 according to DIN EN 16165. It is particularly suitable for hygiene, food and cleanroom areas.

- | For smooth indoor floors
- | Suitable for pedestrians and lift trucks
- | Suitable for concrete screed smooth, EP / Pu / MMA coatings and tiles

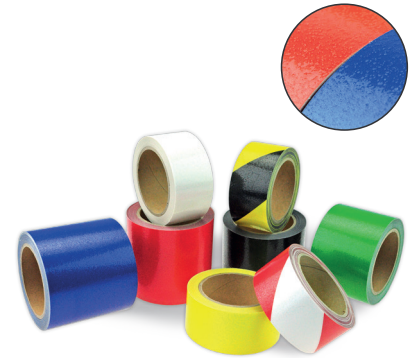

### TECHNICAL DATA

Material:	Plastic film
Thickness: (without Liner)	0.3 mm
Liner:	Plastic foil
Surface:	Glossy
Slip-class:	R10 according to DIN EN 16165
Adhesive:	Acrylic
Adhesive property:	Permanent
Temperature resistance:	-20 °C to +70 °C
Application temperature:	≥12 °C
Available colours:	Single-colour, multi-colour, individually printed

### MORE INFORMATION

It is possible to drive over the belt with floor conveyors. Turning and twisting on the tape with floor conveyors or similar heavy vehicles must be avoided and can lead to the destruction of the tape. To achieve optimum adhesion, the substrate must be free of release agents such as grease, oil, surfactants, dirt and dust. Store in a dry and UV-protected place at 10°C to 25°C.

#### Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.