


## WT-5610 Conformable space marking

### PRODUCT AND APPLICATION DESCRIPTION

Suitable for non-slip marking of uneven and profiled surfaces as well as floors with anti-slip coating in production or working areas. The aluminum carrier adapts to the profile of the underground, such as checker plate.

- | For textured floors indoor and outdoor
- | Pedestrian and lift truck suitable
- | Suitable for concrete screed smooth, EP / Pu / MMA coatings, EP / Pu / MMA. Coatings anti-slip, tiles, concrete paving, asphalt

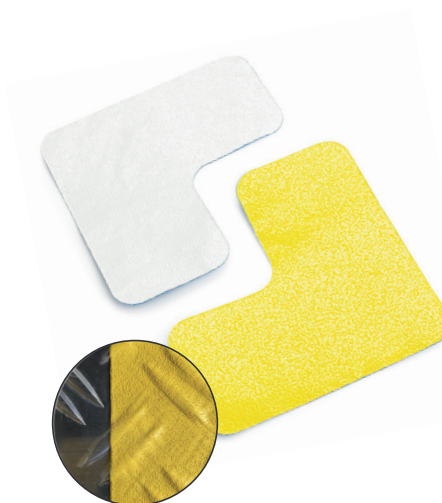

### TECHNISCHE DATEN

Material:	Coated soft aluminum
Thickness: (without liner)	0,6 mm
Liner:	Silicone/ PET foil
Surface:	Slightly glossy
Slip class:	R12 according to DIN EN 16165
Adhesive:	Synthetic rubber
Adhesive property:	Extra permanent
Temperature range:	-20 °C to +120 °C
Processing temperature:	≥12 °C
Available colors:	yellow, white

### WEITERE INFORMATIONEN

It is possible to drive over the marking with floor conveyors. Turning and twisting on the belt with floor conveyors or similar heavy vehicles must be avoided and may destroy the marking.

To achieve the optimal adhesive strength, the substrate has to be free from release agents such as greases, oils, surfactants, dirt and dust. The storage should be dry and UV-protected between 20°C and 30°C.

### Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.