


WT-5645 Conformable floor marking tape

PRODUCT AND APPLICATION DESCRIPTION

Suitable for non-slip marking of uneven and profiled surfaces as well as floors with anti-slip coating in production or work areas. The aluminium support adapts to the profile of the substrate, such as checker plate.

- | For textured floors indoors and outdoors
- | Suitable for pedestrians and lift trucks
- | Suitable for concrete screed smooth, EP / PU / MMA coatings, EP / PU / MMA coatings anti-slip, tiles, concrete pavers, asphalt

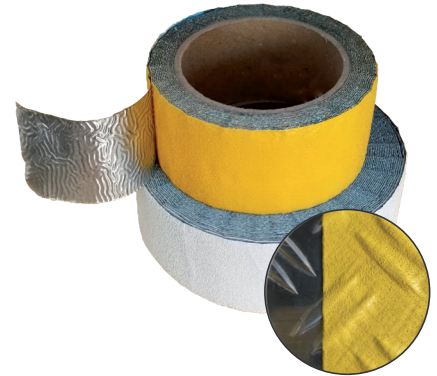

TECHNICAL DATA

| | |
|----------------------------|-------------------------------|
| Material: | Coated soft aluminium |
| Thickness: (without Liner) | 0.6 mm |
| Liner: | Silicone/ PET film |
| Surface: | Slightly glossy |
| Slip class: | R12 according to DIN EN 16165 |
| Adhesive: | Synthetic rubber |
| Adhesive property: | Extra permanent |
| Temperature resistance: | -20 °C to +120 °C |
| Application temperature: | ≥12 °C |
| Available colours: | Yellow, white |

MORE INFORMATION

It is possible to drive over the belt with floor conveyors. Turning and twisting on the tape with floor conveyors or similar heavy vehicles must be avoided and can lead to the destruction of the tape. To achieve optimum adhesion, the substrate must be free of release agents such as grease, oil, surfactants, dirt and dust. Store in a dry and UV-protected place at 20°C to 30°C.

Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.