

1TAPES



Anti-slip-solutions

Self-adhesive anti-slip tapes for a safety step-up



Anti-slip tape - Medium

WT-5411 // The tape for versatile use

- Slip resistance R13
- For medium to heavy-duty use
- Wide range of colors, individual widths possible
- Suitable for smooth floors in indoor and outdoor areas

Material: Mineral grain embedded in synthetic resin

Material thickness: 0.9 ± 0.1 mm


Surface: medium

Slip class: R13

Adhesive: permanent acrylic adhesive

Application area: Indoor and weather-protected outdoor area

Temperature range: 5411: -15°C bis +70°C | 5416: -5°C bis +50°C



White	Width 50 mm	Width 75 mm
Length 6 m	5411.08.1050	5411.08.1075
Length 18 m	5411.08.0050	5411.08.0075



Black	Width 50 mm	Width 75 mm
Length 6 m	5411.07.1050	5411.07.1075
Length 18 m	5411.07.0050	5411.07.0075




Grey	Width 50 mm	Width 75 mm
Length 6 m	5411.06.1050	5411.06.1075
Length 18 m	5411.06.0050	5411.06.0075



Green	Width 50 mm	Width 75 mm
Length 6 m	5411.02.1050	5411.02.1075
Length 18 m	5411.02.0050	5411.02.0075




Blue	Width 50 mm	Width 75 mm
Length 6 m	5411.10.1050	5411.10.1075
Length 18 m	5411.10.0050	5411.10.0075




Red	Width 50 mm	Width 75 mm
Length 6 m	5411.01.1050	5411.01.1075
Length 18 m	5411.01.0050	5411.01.0075




Signal yellow	Width 50 mm	Width 75 mm
Length 6 m	5411.31.1050	5411.31.1075
Length 18 m	5411.31.0050	5411.31.0075




Yellow	Width 50 mm	Width 75 mm
Length 6 m	5411.04.1050	5411.04.1075
Length 18 m	5411.04.0050	5411.04.0075




Public	Width 50 mm	Width 75 mm
Length 6 m	5411.47.1050	5411.47.1075
Length 18 m	5411.47.0050	5411.47.0075



Yellow-black	Width 50 mm	Width 75 mm
Length 6 m	5411.17.1050-L	5411.17.1075-L
Length 18 m	5411.17.0050-L	5411.17.0075-L



Luminescent-black	Width 50 mm	Width 75 mm
Length 6 m	5416.17.1050-L	5416.17.1075-L
Length 18 m	5416.17.0050-L	5416.17.0075-L



Luminescent	Width 50 mm	Width 75 mm
Length 6 m	5416.04.1050	5416.04.1075
Length 18 m	5416.04.0050	5416.04.0075

Anti-slip tape - rough

WT-5412 // The tape with the coarse grit

- Slip resistance R13
- Ideal for high traffic areas
- Suitable for smooth floors in indoor and outdoor areas

Material: Mineral grain embedded in synthetic resin

Material thickness: 1.5 ± 0.1 mm


Surface: rough

Slip class: R13



Adhesive: permanent acrylic adhesive

Application area: Indoor and weather-protected outdoor area

Temperature range: -15°C to +70°C




Yellow	Width 50 mm	Width 75 mm
Length 6 m	5412.04.1050	5412.04.1075
Length 18 m	5412.04.0050	5412.04.0075



Black	Width 50 mm	Width 75 mm
Length 6 m	5412.07.1050	5412.07.1075
Length 18 m	5412.07.0050	5412.07.0075

The WT-5412 has a slip resistance of R13 according to DIN 16165 and is particularly suitable for areas with high traffic and a high degree of soiling.

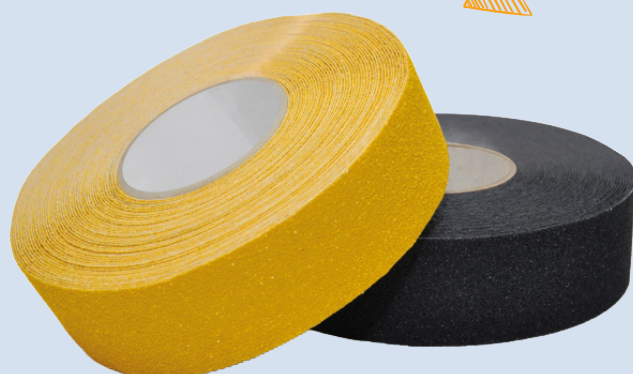

Anti-slip tape - Adaptable

WT-5414 // Adapts to the profile of the surface

- Slip resistance R13
- Especially for uneven surfaces
- Excellent adaptation to checker plate
- Suitable for indoor and outdoor areas

Material: Aluminum foil

Material thickness: 0.8 mm

Surface: medium

Slip class: R13

Adhesive: permanent acrylic adhesive

Application area: Indoor and weather-protected outdoor area

Temperature range: -23°C to +65°C



Yellow	Width 50 mm	Width 75 mm
Length 6 m	5414.04.1050	5414.04.1075
Length 18 m	5414.04.0050	5414.04.0075



Black	Width 50 mm	Width 75 mm
Length 6 m	5414.07.1050	5414.07.1075
Length 18 m	5414.07.0050	5414.07.0075



Yellow-black	Width 50 mm	Width 75 mm
Length 6 m	5414.17.1050-L	5414.17.1075-L
Length 18 m	5414.17.0050-L	5414.17.0075-L



The flexible aluminum backing adapts very well to the surface structure. This tape is installed and shaped using a pressure roller.



Floor marking tape with anti-slip surface

WT-5420 // The easy-to-clean tape

- | Slip resistance R11
- | Usable for wet barefoot areas, class C
- | Applicable for hygienic areas
- | Wide range of colors and individually printable
- | Suitable for smooth indoor floors

Material: PET

Material thickness: 0.4 mm


Surface: glossy

Slip class: R11, class C


Adhesive: permanent acrylic adhesive

Application area: Indoor



Temperature range: -20°C to +70°C





Yellow	Width 50 mm	Width 75 mm
Length 10 m	5420.04.050-10	5420.04.075-10




Yellow-black	Width 50 mm	Width 75 mm
Length 10 m	5420.17.050-10	5420.17.075-10




Blue	Width 50 mm	Width 75 mm
Length 10 m	5420.10.050-10	5420.10.075-10




White	Width 50 mm	Width 75 mm
Length 10 m	5420.08.050-10	5420.08.075-10



Red
5420.01



Red-White
5420.18



Green
5420.02

Special tapes

For special anti-slip applications

- | Anti-slip surface for sports and fitness equipment
- | For slip protection in transport and logistics
- | Very suitable for barefoot areas and high-quality floors in the private sector
- | Self-adhesive on all smooth surfaces

Material: PVC

Material thickness: 0.9 ± 0.1 mm

Adhesive: permanent acrylic adhesive

Application area: Indoor


Temperature range: Corase elastic: -30°C to +70°C

Nubbed tape: -10°C to +60°C


Aqua-transparent: -5°C to +50°C



Corase elastic	Width 50 mm	Width 75 mm
Length 6 m	5415.24.1050	5415.24.1075
Length 18 m	5415.24.0050	5415.24.0075



Nubbed tape	Width 50 mm	Width 75 mm
Length 5 m	5458.09.3050	5458.09.3075



Aqua-transparent	Width 50 mm	Width 75 mm
Length 6 m	5415.09.1050	5415.09.1075
Length 18 m	5415.09.0050	5415.09.0075




Strong anti-slip tape


WT-5845 // The tape for difficult surfaces



- | Retroreflective surface
- | R11 slip resistance
- | Extremely wear-resistant and highly adhesive
- | Suitable for rough, uneven outdoor surfaces



Material: PU
Material thickness: 1.6 mm
Surface: retroreflective
Slip class: R11
Adhesive: extra permanent synthetic rubber
Application area: Indoors, outdoors with Primer No. 5
Temperature range: -20°C to +70°C

		
Yellow	Width 50 mm	Width 75 mm
Length 12,5 m	5845.04.050-12	5845.04.075-12
Length 25 m	5845.04.050	5845.04.075

		
Yellow-black	Width 50 mm	Width 75 mm
Length 12,5 m	5845.17.050-12	5845.17.075-12
Length 25 m	5845.17.050	5845.17.075

		
Blue	Width 50 mm	Width 75 mm
Length 12,5 m	5845.10.050-12	5845.10.075-12
Length 25 m	5845.10.050	5845.10.075

		
White	Width 50 mm	Width 75 mm
Length 12,5 m	5845.08.050-12	5845.08.075-12
Length 25 m	5845.08.050	5845.08.075

					
Red	Black	Green	Primer No. 5	1000 ml	
5845.01	5845.07	5845.02	3 m²	3051.25.1000	


Tactile floor marking tape

WT-5848 // For clear orientation and safe routes

- | Visually and tactilely distinct from conventional strips
- | Enables visually impaired people to navigate their surroundings
- | Non-slip surface with good grip, even when wet
- | Suitable for outdoor use

Material: PU
Material thickness: 2,3 mm ± 0,5 mm
Surface: matt reflective
Slip class: R11
Adhesive: extra permanent synthetic rubber
Application area: Indoor area, outdoor area

		
Yellow	Width 50 mm	Width 75 mm
Length 12,5 m	5848.04.050-12	5848.04.075-12

		
White	Width 50 mm	Width 75 mm
Length 12,5 m	5848.08.050-12	5848.08.075-12

Our general terms and conditions apply, these can be found at www.1tatapes.de
Misprints, errors and changes excepted.




Stair nosing

Stair nosing and edge profiles



WT-5409 – Thin Line

- | Extra thin closing edge, R10 or R13
- | Suitable for indoor use
- | Can be glued or screwed

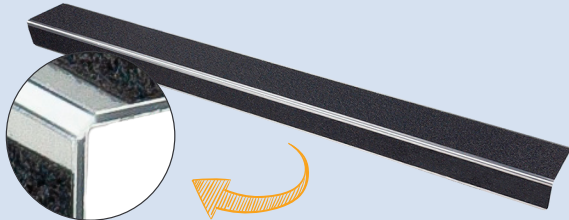


WT-5407 – General Line

- | Wear-resistant and slip-resistant, R10 or R13
- | Suitable for indoor and outdoor use
- | Can be screwed or glued (with mounting adhesive)

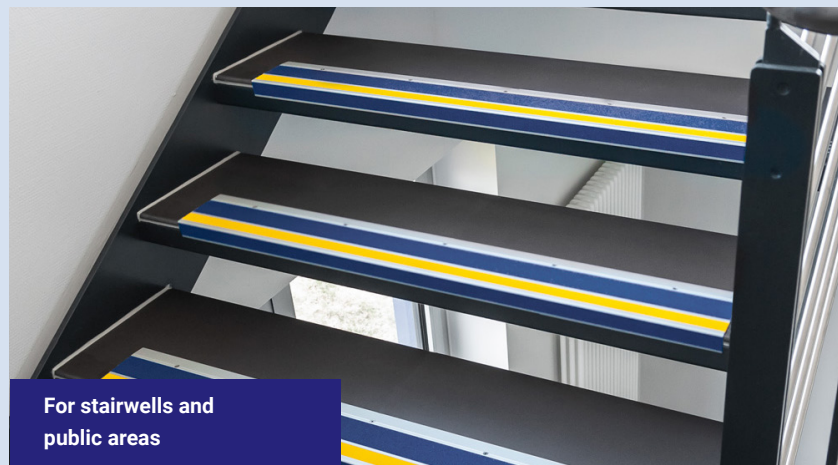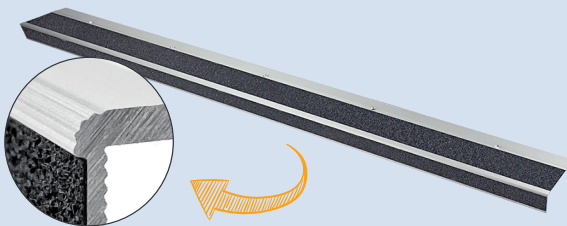

WT-5406 – Extreme Line

- | Extremely wear-resistant and slip-resistant, R13
- | Suitable for indoor and outdoor areas
- | Can be glued or screwed

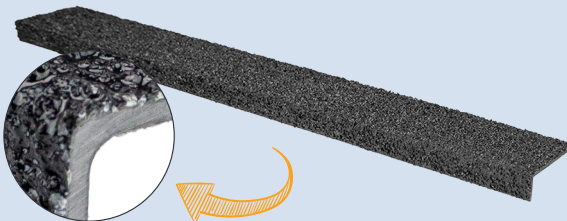

Further information can be found in our separate folder for stair edge profiles and anti-slip plates.



tatapes.eu/info/catalogues.html

