

# Anti-slip solutions

Self-adhesive anti-slip tapes for a safe step

---



## Anti-slip tape - medium

WT-5411 // The tape for a wide range of applications

- Slip resistance R13
- For medium to heavy-duty use
- Wide range of colours, individual widths possible
- Suitable for smooth floors in indoor and outdoor areas

**Material:** mineral granules embedded in synthetic resin

**Material thickness:** 0,8 - 1,0 mm

**Surface:** medium

**Slip class:** R13

**Adhesive:** permanent acrylic adhesive

**Application area:** indoor and weather-protected outdoor area


**Temperature range:** 5411: -15°C to +70°C | 5416: -5°C to +50°C



yellow	Breite 50 mm	Breite 75 mm
length 6 m	5411.04.1050	5411.04.1075
length 18 m	5411.04.0050	5411.04.0075




public	Breite 50 mm	Breite 75 mm
length 6 m	5411.47.1050	5411.47.1075
length 18 m	5411.47.0050	5411.47.0075




yellow-black	Breite 50 mm	Breite 75 mm
length 6 m	5411.17.1050	5411.17.1075
length 18 m	5411.17.0050	5411.17.0075




lumin.-black	Breite 50 mm	Breite 75 mm
length 6 m	5416.17.1050	5416.17.1075
length 18 m	5416.17.0050	5416.17.0075



red	Breite 50 mm	Breite 75 mm
length 6 m	5411.01.1050	5411.01.1075
length 18 m	5411.01.0050	5411.01.0075




white	width 50 mm	width 75 mm
length 6 m	5411.08.1050	5411.08.1075
length 18 m	5411.08.0050	5411.08.0075



black	width 50 mm	width 75 mm
length 6 m	5411.07.1050	5411.07.1075
length 18 m	5411.07.0050	5411.07.0075



grey	width 50 mm	width 75 mm
length 6 m	5411.06.1050	5411.06.1075
length 18 m	5411.06.0050	5411.06.0075




brown	width 50 mm	width 75 mm
length 6 m	5411.05.1050	5411.05.1075
length 18 m	5411.05.0050	5411.05.0075



green	width 50 mm	width 75 mm
length 6 m	5411.02.1050	5411.02.1075
length 18 m	5411.02.0050	5411.02.0075



blue	width 50 mm	width 75 mm
length 6 m	5411.10.1050	5411.10.1075
length 18 m	5411.10.0050	5411.10.0075



luminescent	width 50 mm	width 75 mm
length 6 m	5416.04.1050	5416.04.1075
length 18 m	5416.04.0050	5416.04.0075



light blue	width 50 mm	width 75 mm
length 6 m	5411.03.1050	5411.03.1075
length 18 m	5411.03.0050	5411.03.0075



neon orange	width 50 mm	width 75 mm
length 6 m	5411.12.1050	5411.12.1075
length 18 m	5411.12.0050	5411.12.0075



signal yellow	width 50 mm	width 75 mm
length 6 m	5411.31.1050	5411.31.1075
length 18 m	5411.31.0050	5411.31.0075



## Anti-slip tape - coarse

WT-5412 // The tape with the coarse grain

- | Slip resistance R13
- | Ideal for high frequency of pedestrian traffic and high degree of pollution
- | Suitable for smooth floors indoors and outdoors

**Material:** mineral granules embedded in synthetic resin

**Material thickness:** 1,4 - 1,6 mm


**Surface:** coarse

**Slip class:** R13



**Adhesive:** permanent acrylic adhesive

**Application area:** indoor and weather-protected outdoor area

**Temperature range:** -15°C to +70°C



yellow	width 50 mm	width 75 mm
length 6 m	5412.04.1050	5412.04.1075
length 18 m	5412.04.0050	5412.04.0075




black	width 50 mm	width 75 mm
length 6 m	5412.07.1050	5412.07.1075
length 18 m	5412.07.0050	5412.07.0075

## Stair nosing profiles

The alternative for a safe step

Further information can be found in our separate folder card for **Stair nosing profiles and anti-slip plates**

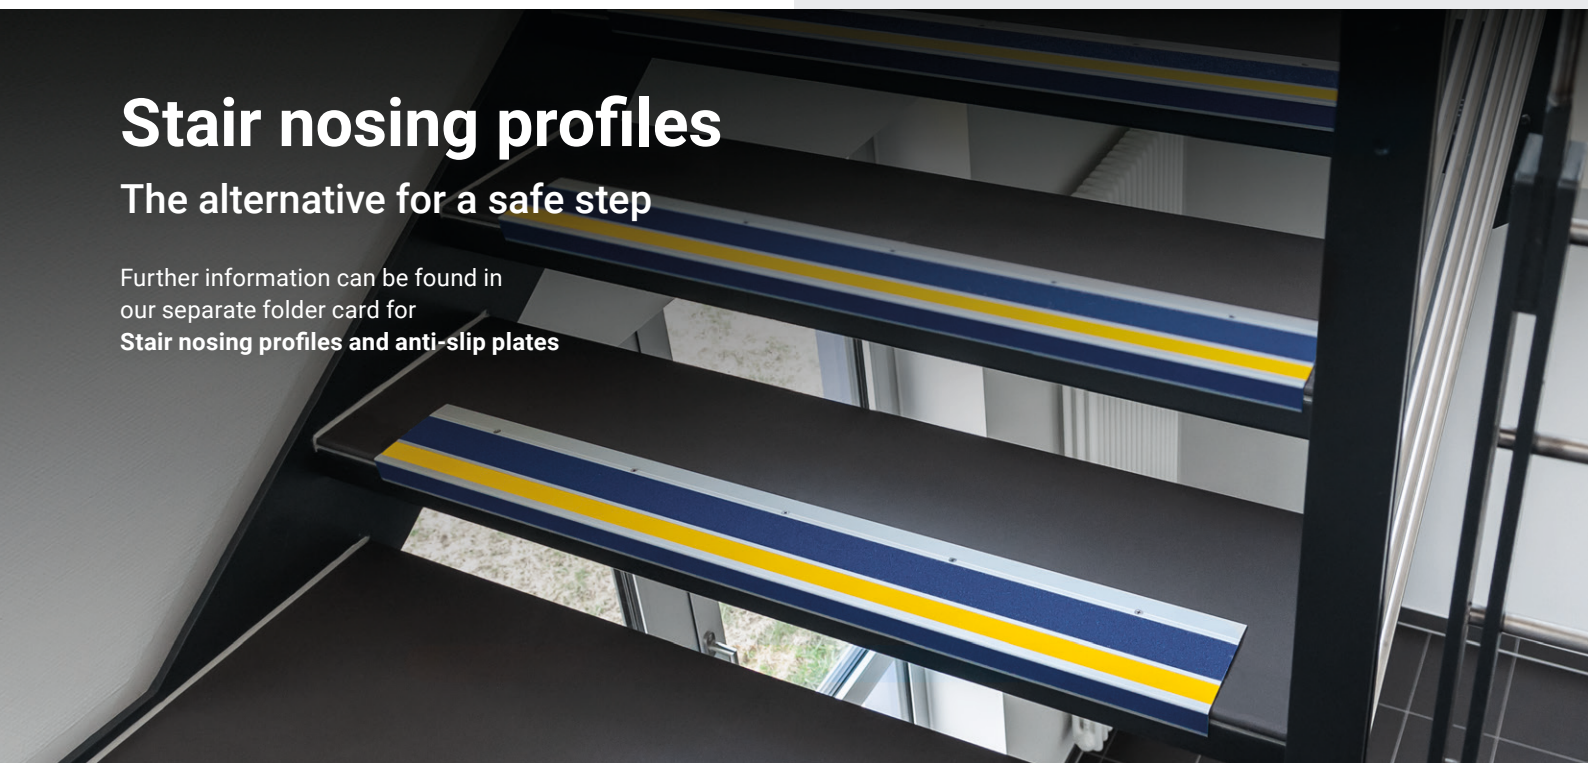

## Anti-slip tape - Adaptable

WT-5414 // Adapts to the profile of the surface

- | Slip resistance R13
- | Especially for uneven surfaces
- | Excellent adaptation to checker plate
- | Suitable for indoor and outdoor areas

**Material:** mineral granules embedded in synthetic resin

**Material thickness:** 0,8 mm

**Surface:** medium

**Slip class:** R13

**Adhesive:** permanent acrylic adhesive

**Application area:** indoor and weather-protected outdoor area

**Temperature range:** -23°C to +65°C



yellow	width 50 mm	width 75 mm
length 6 m	5414.04.1050	5414.04.1075
length 18 m	5414.04.0050	5414.04.0075



black	width 50 mm	width 75 mm
length 6 m	5414.07.1050	5414.07.1075
length 18 m	5414.07.0050	5414.07.0075



yellow-black	width 50 mm	width 75 mm
length 6 m	5414.17.1050	5414.17.1075
length 18 m	5414.17.0050	5414.17.0075



The flexible aluminum backing adapts very well to the surface structure and is installed and formed by using a pressure roller.



## Stair and edge profiles

WT-5409 – Thin Line

- | Particularly thin edge finish, R10 or R13
- | Suitable for indoor use
- | Installed by gluing or screwing



WT-5407 – General Line

- | Wear-resistant and slip-resistant, R10 or R13
- | Suitable for indoor and outdoor use
- | Installed by screwing  
(can also be glued with assembly adhesive)



WT-5406 – Extreme Line

- | Extremely wear-resistant and slip-resistant, R13
- | Suitable for indoor and outdoor use
- | Installed by gluing or screwing



# Anti-slip tapes

## Floor marking tape with anti-slip surface Plus

WT-5420 // The tape for easy cleaning

- | Slip resistance R11
- | Suitable for wet barefoot areas, class C
- | Ideal for hygienic areas
- | Wide range of colours and individually printable
- | Suitable for smooth indoor floors

**Material:** plastic foil

**Material thickness:** 0,4 mm

**Surface:** glossy

**Slip class:** R11, Class C

**Adhesive:** permanent acrylic adhesive

**Application area:** indoor


**Temperature range:** -20°C to +70°C




yellow	width 50 mm	width 75 mm
length 10 m	5420.04.050-10	5420.04.075-10



yellow-black	width 50 mm	width 75 mm
length 10 m	5420.17.050-10	5420.17.075-10

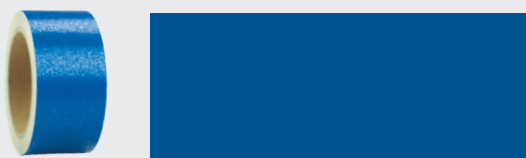

blue	width 50 mm	width 75 mm
length 10 m	5420.10.050-10	5420.10.075-10

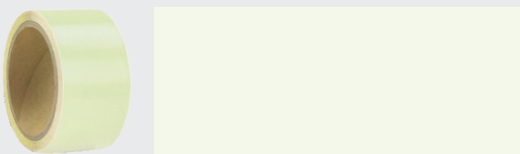

luminescent	width 50 mm	width 75 mm
length 10 m	5420.29.050-10	5420.29.075-10



red	red-white	white	green
5420.01	5420.18	5420.08	5420.02

## Special tapes

For special anti-slip applications

- | Anti-slip surface for sports and fitness equipment
- | For slip protection in transportation and logistics
- | Very suitable for barefoot areas and high-quality floors in the private sector
- | Self-adhesive on all smooth surfaces

**Material:** PVC

**Material thickness:** 0,8 - 1,0 mm


**Adhesive:** permanent acrylic adhesive

**Application area:** indoor


**Temperature range:** Coarse elastic: -30°C to +70°C

Nubbed tape: -10°C to +60°C


Aqua-transparent: -5°C to +50°C

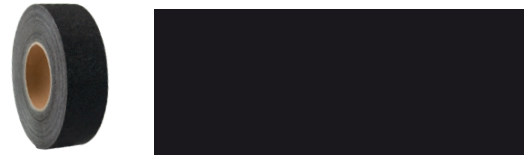

coarse elastic	width 50 mm	width 75 mm
length 6 m	5415.24.1050	5415.24.1075
length 18 m	5415.24.0050	5415.24.0075

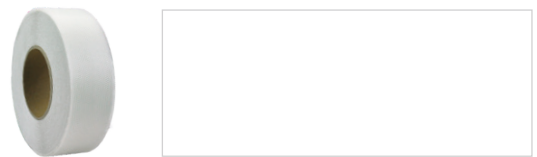

nubbed tape	width 50 mm	width 75 mm
length 5 m	5458.09.3050	5458.09.3075

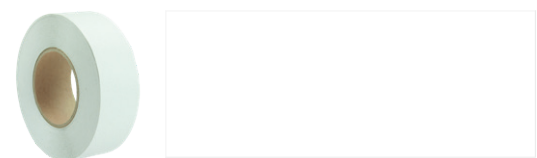

aqua-transparent	width 50 mm	width 75 mm
length 6 m	5415.09.1050	5415.09.1075
length 18 m	5415.09.0050	5415.09.0075



## Robust anti-slip tape

WT-5845 // The tape for difficult floors

- Retroreflective surface
- Slip resistance R11
- Extremely wear-resistant and highly adhesive
- Suitable for rough, uneven surfaces in outdoor areas

**Material:** PU

**Material thickness:** 1,6 mm


**Surface:** retroreflective

**Slip class:** R11


**Adhesive:** extra permanent synthetic adhesive

**Application area:** indoor, outdoor with Primer No. 5



**Temperature range:** -20°C to +70°C




yellow	width 50 mm	width 75 mm
length 12,5 m	5845.04.050-12	5845.04.075-12
length 25 m	5845.04.050	5845.04.075





yellow-black	width 50 mm	width 75 mm
length 12,5 m	5845.17.050-12	5845.17.075-12
length 25 m	5845.17.050	5845.17.075



blue	width 50 mm	width 75 mm
length 12,5 m	5845.10.050-12	5845.10.075-12
length 25 m	5845.10.050	5845.10.075



white	width 50 mm	width 75 mm
length 12,5 m	5845.08.050-12	5845.08.075-12
length 25 m	5845.08.050	5845.08.075



red	black	green	Primer No. 5	1000 ml
5845.01	5845.07	5845.02	3 m <sup>2</sup>	3051.25.1000

Our general terms and conditions apply, these can be found in our onlineshop. Misprints, errors and changes excepted.

## Individual and durable designs

WT-5845 // Robust anti-slip marking

- Ideal for outdoor use
- Slip resistance R11
- Individual designs possible
- Especially for uneven surfaces, e.g. anti-slip coatings, concrete paving and asphalt floors



size	article number
400 mm	SW14.FDZ79.400
600 mm	SW14.FDZ79.600
900 mm	SW14.FDZ79.900

size	article number
400 mm	VP01.FDZ79.400
600 mm	VP01.FDZ79.600
900 mm	VP01.FDZ79.900



size	article number
400 mm	VP03.FDZ79.400
600 mm	VP03.FDZ79.600
900 mm	VP03.FDZ79.900

size	article number
400 mm	VP02.FDZ79.400
600 mm	VP02.FDZ79.600
900 mm	VP02.FDZ79.900

For the optimum outdoor use, we recommend the application of Primer No. 5 and edge sealer.

