

1TAPES

Stair nosing, angle edges and anti-slip plates

Safety, protection and great design



Stair nosing

The multitalented protection for your stairs

Your desired colour
upon demand!



More safety for your stairs

In public areas and company buildings, stairs are usually heavily loaded and at the same time they represent a high security risk. Our stair nosings minimize the risks. Coloured highlights increase visibility and thus safety.


The reinforced edges and the tested anti-slip coverings also reduce danger of slip. Broken steps and frayed edges can simply be covered and damage is no longer visible. Screwed or self-adhesive, for the entire staircase or individual steps, our profiles keep what they promise.

Various surfaces

Choose between three surfaces with different slip classes. For light pollution indoor we recommend »Soft«. »Medium« is suitable for high frequented rooms indoor or outdoor. »Strong« (GRP stair nosing) is an extremely durable surface for every floor indoor and outdoor. Even under moisture and oil it retains his high anti-slip effect.



Soft R10
embossed PVC



Medium R13
Mineral grain



Strong R13
extra strong
Mineral grain

WT-5409 – Thin Line

- Indoor applications
- Screwable or self-adhesive

The Decent
particularly thin



WT-5407 – General Line

- Indoor and outdoor applications
- Screwable
(additional self-adhesive with mounting adhesives)

The Allrounder
very upscale



WT-5406 – Extreme Line

- Indoor and outdoor application
- Screwable or self-adhesive

The Robust
extremely durable



Anti-slip plate »Thin Line«

WT-5408 // Anti-slip profile

- | slip resistance R13 or R10
- | Indoor applications
- | Wear- resistant and slip-proof, even for high frequencies
- | Individual anti-slip insert according to your request

Material: aluminium composite

Colour: silver

Drill: yes, concealed


Installation: screwable on or self-adhesive

Design: 100 mm wide

Delivery: self-adhesive

Individual length: on request

Design wide I tread 100 mm



Surface **medium** R13

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5408.07.100-600	5408.07.100-800	5408.07.100-1000
02	yellow/black	5408.17.100-600	5408.17.100-800	5408.17.100-1000
03	public	5408.47.100-600	5408.47.100-800	5408.47.100-1000
04	yellow	-	-	-
05	photoluminescent/black	5408.17FN.100-600	5408.17FN.100-800	5408.17FN.100-1000
06	yellow/black & „Individual“	5408.99.100-600	5408.99.100-800	5408.99.100-1000
07	photoluminescent/black & „Individual“	5408.99FN.100-600	5408.99FN.100-800	5408.99FN.100-1000


Surface **soft** R10 (only for indoor use)

Length 600 mm	Length 800 mm	Length 1000 mm
5408.2.07.100-600	5408.2.07.100-800	5408.2.07.100-1000
5408.2.17.100-600	5408.2.17.100-800	5408.2.17.100-1000
-	-	-
5408.2.04.100-600	5408.2.04.100-800	5408.2.04.100-1000
5408.2.17FN.100-600	5408.2.17FN.100-800	5408.2.17FN.100-1000
5408.2.99.100-600	5408.2.99.100-800	5408.2.99.100-1000
5408.2.99FN.100-600	5408.2.99FN.100-800	5408.2.99FN.100-1000

Discover our anti-slip tapes!

For protection and marking of special hazardous areas with excellent anti-slip properties.

Let yourself be comprehensively informed by our Customer service! **+49 36602 289100**

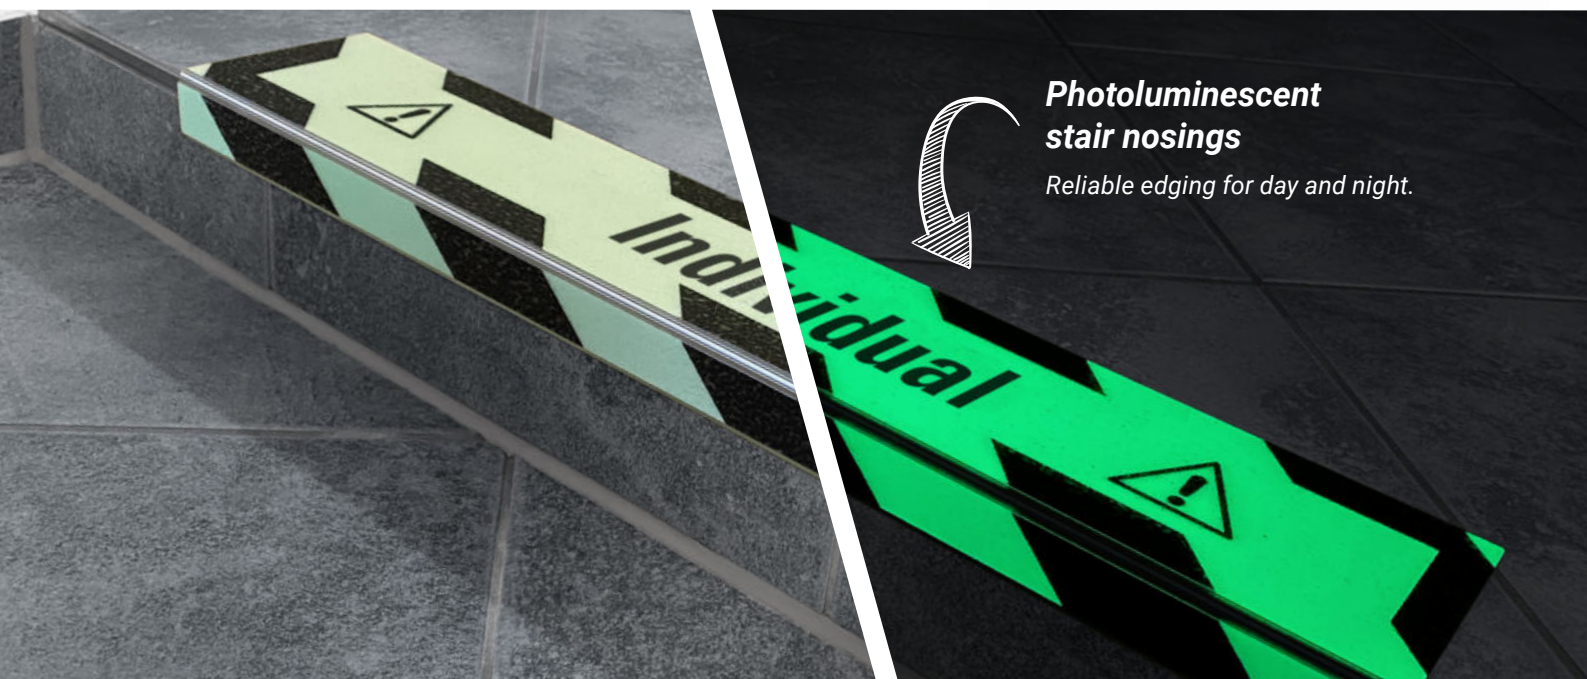

Photoluminescent stair nosings

Reliable edging for day and night.

Anti-slip profile »Thin Line«

WT-5409 // stair nosing

- | Slip class R13 or R10
- | Indoor applications
- | Wear- resistant and slip-proof, even for high frequencies
- | Individual anti-slip insert according to your request

Material: aluminium composite

Colour: silver

Drill: yes, concealed



Installation: screwable or self-adhesive

Design: narrow and wide

Delivery: self-adhesive

Individual length: on request

Design narrow | tread 50 mm

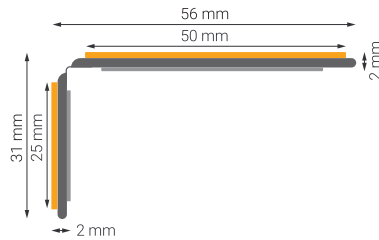



Surface medium R13

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5409.07.050-600	5409.07.050-800	5409.07.050-1000
02	yellow/black	5409.17.050-600	5409.17.050-800	5409.17.050-1000
03	public	5409.47.050-600	5409.47.050-800	5409.47.050-1000
04	yellow	-	-	-
05	photoluminescent/black	5409.17FN.050-600	5409.17FN.050-800	5409.17FN.050-1000
06	black & photoluminescent black	5409.7297.050-600	5409.7297.050-800	5409.7297.050-1000
07	black & photoluminescent photoluminescent	5409.729.050-600	5409.729.050-800	5409.729.050-1000
08	black & yellow	5409.0704.050-600	5409.0704.050-800	5409.0704.050-1000

Surface soft R10 (only for indoor use)

Length 600 mm	Length 800 mm	Length 1000 mm
5409.2.07.050-600	5409.2.07.050-800	5409.2.07.050-1000
5409.2.17.050-600	5409.2.17.050-800	5409.2.17.050-1000
-	-	-
5409.2.04.050-600	5409.2.04.050-800	5409.2.04.050-1000
5409.2.17FN.050-600	5409.2.17FN.050-800	5409.2.17FN.050-1000
5409.2.7297.050-600	5409.2.7297.050-800	5409.2.7297.050-1000
5409.2.729.050-600	5409.2.729.050-800	5409.2.729.050-1000
5409.2.0704.050-600	5409.2.0704.050-800	5409.2.0704.050-1000

Design wide | tread 100 mm

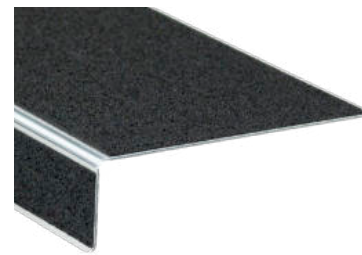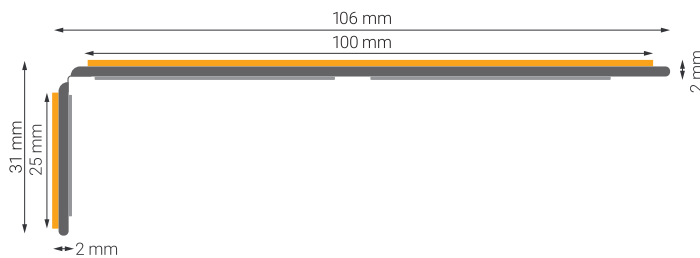

Surface medium R13

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5409.07.100-600	5409.07.100-800	5409.07.100-1000
02	yellow/black	5409.17.100-600	5409.17.100-800	5409.17.100-1000
03	yellow	-	-	-
04	public	5409.47.100-600	5409.47.100-800	5409.47.100-1000
05	photoluminescent/black	5409.17FN.100-600	5409.17FN.100-800	5409.17FN.100-1000
06	black & photoluminescent black	5409.7297.100-600	5409.7297.100-800	5409.7297.100-1000
07	black & photoluminescent photoluminescent	5409.729.100-600	5409.729.100-800	5409.729.100-1000
08	yellow/black & „Individual“	5409.99.100-600	5409.99.100-800	5409.99.100-1000
09	photoluminescent & black + „Individual“	5409.99FN.100-600	5409.99FN.100-800	5409.99FN.100-1000
10	black & yellow	5409.0704.100-600	5409.0704.100-800	5409.0704.100-1000
11	black & yellow yellow	5409.74.100-600	5409.74.100-800	5409.74.100-1000

Surface soft R10 (only for indoor use)


Length 600 mm	Length 800 mm	Length 1000 mm
5409.2.07.100-600	5409.2.07.100-800	5409.2.07.100-1000
5409.2.17.100-600	5409.2.17.100-800	5409.2.17.100-1000
5409.2.04.100-600	5409.2.04.100-800	5409.2.04.100-1000
-	-	-
5409.2.17FN.100-600	5409.2.17FN.100-800	5409.2.17FN.100-1000
5409.2.7297.100-600	5409.2.7297.100-800	5409.2.7297.100-1000
5409.2.729.100-600	5409.2.729.100-800	5409.2.729.100-1000
5409.2.99.100-600	5409.2.99.100-800	5409.2.99.100-1000
5409.2.99FN.100-600	5409.2.99FN.100-800	5409.2.99FN.100-1000
5409.2.0704.100-600	5409.2.0704.100-800	5409.2.0704.100-1000
5409.2.74.100-600	5409.2.74.100-800	5409.2.74.100-1000

Anti-slip profile » General Line «



WT-5407 // stair nosing

- Anti-slip class R13 or R10
- Indoor and outdoor applications
- Wear- resistant and slip-proof, even for high frequencies
- Individual anti-slip insert according to your request

Material: aluminium
Colour: silver anodised
Drill: countersunk
Installation: screwable
Design: narrow and wide
Delivery: incl. screws and dowels
Individual length: on request



Design narrow I tread 90 mm

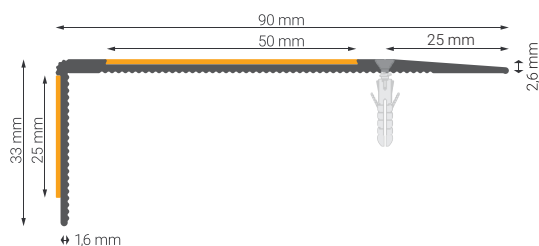



Surface **medium R13**

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5407.07.090-600	5407.07.090-800	5407.07.090-1000
02	yellow/black	5407.17.090-600	5407.17.090-800	5407.17.090-1000
03	public	5407.47.090-600	5407.47.090-800	5407.47.090-1000
04	yellow	-	-	-
05	photoluminescent/black	5407.17FN.090-600	5407.17FN.090-800	5407.17FN.090-1000
06	black & yellow	5407.0704.090-600	5407.0704.090-800	5407.0704.090-1000
07	grey	5407.06.090-600	5407.06.090-800	5407.06.090-1000

Surface **soft R10** (only for indoor use)

Length 600 mm	Length 800 mm	Length 1000 mm
5407.2.07.090-600	5407.2.07.090-800	5407.2.07.090-1000
5407.2.17.090-600	5407.2.17.090-800	5407.2.17.090-1000
-	-	-
5407.2.04.090-600	5407.2.04.090-800	5407.2.04.090-1000
5407.2.17FN.090-600	5407.2.17FN.090-800	5407.2.17FN.090-1000
5407.2.0704.090-600	5407.2.0704.090-800	5407.2.0704.090-1000
5407.2.06.090-600	5407.2.06.090-800	5407.2.06.090-1000

Design wide I tread 120 mm

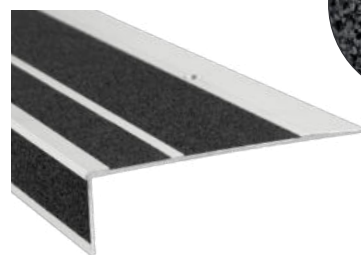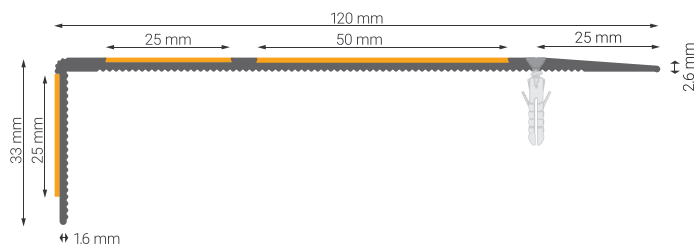

Surface **medium R13**

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5407.07.120-600	5407.07.120-800	5407.07.120-1000
02	black & photoluminescent photoluminescent	5407.729.120-600	5407.729.120-800	5407.729.120-1000
03	black & photoluminescent black	5407.7297.120-600	5407.7297.120-800	5407.7297.120-1000
04	black & yellow	5407.747.120-600	5407.747.120-800	5407.747.120-1000
05	black & yellow yellow	5407.74.120-600	5407.74.120-800	5407.74.120-1000

Surface **soft R10** (only for indoor use)

Length 600 mm	Length 800 mm	Length 1000 mm
5407.2.07.120-600	5407.2.07.120-800	5407.2.07.120-1000
5407.2.729.120-600	5407.2.729.120-800	5407.2.729.120-1000
5407.2.7297.120-600	5407.2.7297.120-800	5407.2.7297.120-1000
5407.2.747.120-600	5407.2.747.120-800	5407.2.747.120-1000
5407.2.74.120-600	5407.2.74.120-800	5407.2.74.120-1000

To prevent the front edge of the staircase from breaking out during mounting, the holes are located extra far in the back.






Anti-slip profile » Extreme Line «

WT-5406 // stair nosing


- Slip class R13
- Indoor and outdoor applications
- Wear-resistant and slip-proof, even for high frequencies
- Flame retardant and corrosion-free

Material: glass-fibre reinforced plastic
Colour: yellow and black
Drill: not predrilled
Installation: screwable or self-adhesive
Design: narrow and wide
Individual length: not available

Design wide | tread 230 mm

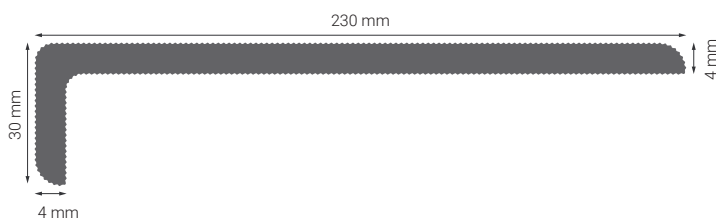

Design narrow | tread 70 mm

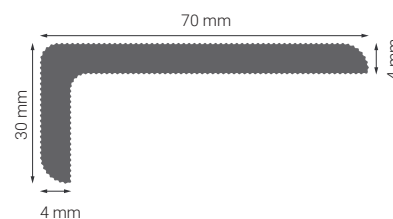

Surface **strong** R13

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5406.07.230-600	5406.07.230-800	5406.07.230-1000
02	yellow	5406.04.230-600	5406.04.230-800	5406.04.230-1000
03	black & yellow	5406.74.230-600	5406.74.230-800	5406.74.230-1000

Surface **strong** R13

Length 600 mm	Length 800 mm	Length 1000 mm
5406.07.070-600	5406.07.070-800	5406.07.070-1000
5406.04.070-600	5406.04.070-800	5406.04.070-1000
-	-	-



Toggle bolt

- For installing GRP profiles

Threads: M8

Screw length: 80 mm



Spring-loaded anchor	Article number
2er-Set	8008.00.304

Mounting adhesive

- Flex 310 M® Classic

Capacity: 200 ml

Colour: grey

Mounting adhesive	Article number
200 ml	8133.05.200

