


## WT-5845 Durable floor marking tape

### PRODUCT AND APPLICATION DESCRIPTION

Durable and self-adhesive floor marking tape. Characterised by its anti-slip and retroreflective surface. Ideal for dry areas, quick to apply, extremely wear-resistant, can be driven over immediately, replaces marking with paint.

- | For smooth and textured floors indoors and outdoors
- | Suitable for pedestrians and lift trucks
- | Suitable for concrete screed smooth, EP / PU / MMA coatings, tiles, concrete paving, asphalt

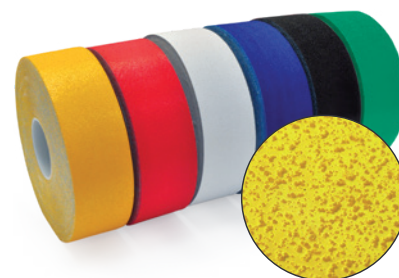

### TECHNICAL DATA

Material:	Polyurethan
Thickness: (without Liner)	1.6 mm ± 0.1 mm
Liner:	Silicone foil
Surface:	Retro reflective
Slip class:	R11 according to DIN EN 16165
Adhesive:	Synthetic rubber
Adhesive property:	Permanent, extra strong
Temperature resistance:	-20°C to +70°C
Application temperature:	≥ 20°C
Available colours:	Yellow, red, blue, green, white, black

### MORE INFORMATION

It is possible to drive over the belt with floor conveyors. Turning and twisting on the tape with floor conveyors or similar heavy vehicles must be avoided and can lead to the destruction of the tape.

To achieve optimum adhesion, the substrate must be free of release agents such as grease, oil, surfactants, dirt and dust. Store in a dry and UV-protected place at 20°C to 30°C.

#### Note

The product information listed above has been compiled to the best of our knowledge and is based on current data. The properties mentioned are typical but therefore do not constitute a specification. The information provided does not relieve the customer of his obligation to test for suitability for the intended applications and processes. All specifications are subject to change without notice. Colour variations are possible.